


- DIODE-TECHNOLOGY
- VERY HIGH-BRIGHTNESS
- COMPACT DESIGN
- ONLY 12kg



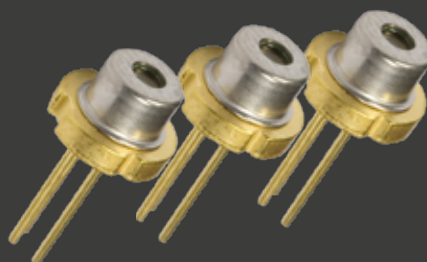

Available wavelengths: 455, 520, 638 nm  
 Typ. power multiline: 10 watts  
 Beam diameter: ~5 mm  
 Beam divergence (full angle):  $\leq 1,2$  mrad  
 Diode type: DIODE

Laserclass: 4  
 Optional safety feature: scanfail, PASS, CDRH / EN60825 compliant  
 Optional gratings: motorized burst, Lumia, Machida, 7-pos. Grating wheel  
 Optional internal controllers: built-in FB-4  
 Scanning: (Cambridge) L-SCAN 30 / Cambridge CT6215

Power input: 90 - 240 VAC, 50-60 Hz, max. 500 W  
 Optional input signal: DMX, IDN (ILDA Digital Network), ILDA, Ethernet, MIDI  
 Modulation: analog, up to 100 kHz  
 Storage temperature: -20°C to +60°C  
 Operating temperature: -10°C to +45°C  
 Cooling: low noise air cooling with regulated fans  
 Housing: dustproof IP54 black anodized aluminium  
 Mounting: stable yoke for truss-mounting incl. safety  
 Total weight: 12 kg (20 kg incl. optional PELI-case)  
 Dimensions (L x W x H): 265 x 270 x 250mm

