


- DIODE-TECHNOLOGY
- HIGH BRIGHTNESS
- FAST SCANNING 35K
- PERFECT FADING
- ULTRA COMPACT



"PURE DIODE"

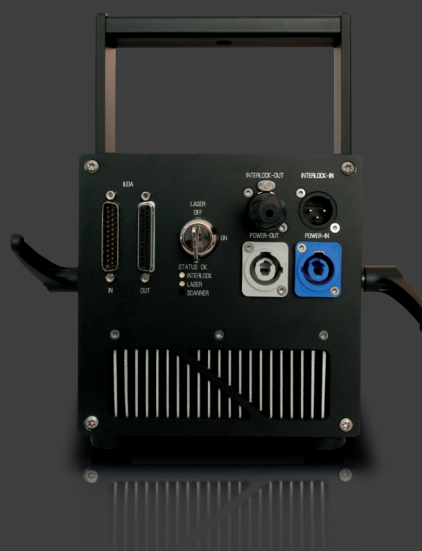

Available wavelengths:	450, 520, 638 nm
Lasertype:	direct-diode
Typ. Power multiline:	3 or 5 Watt
Spec. Power multiline:	2,5 Watt
Beam diameter:	3 x 3 mm
Beam divergence (full angle):	$\leq 1,1$ mrad
Lifetime:	up to 20.000 hours
Scanner:	35K at full angle
Input signal:	ILDA, LIGHTLINE
Modulation:	analog, up to 100 kHz
Storage temperature:	-20°C to +60°C
Operating temperature:	-10°C to +45°C
Electrical input:	90-240 V AC, max. 150 W, 50-60 Hz
Cooling:	low noise air cooling with regulated fans
Housing:	dustproof IP54 black anodized aluminium
Mounting:	stable yoke for truss-mounting incl. safety
Total weight:	6,5 - 8,5 kg (14,5 - 16,5 kg incl. optional PELI-case)
Dimensions 3 W (L x W x H):	290 x 164 x 180mm
Dimensions 5 W (L x W x H):	330 x 164 x 180mm
Safety:	scanfail, PASS, CDRH / EN60825 compliant