



- DIODE-TECHNOLOGY
- VERY HIGH-BRIGHTNESS
- COMPACT DESIGN
- ONLY 12kg

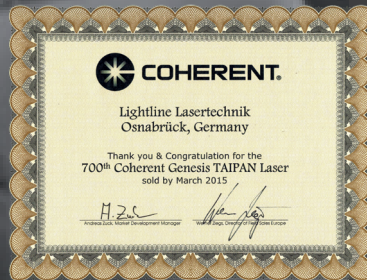

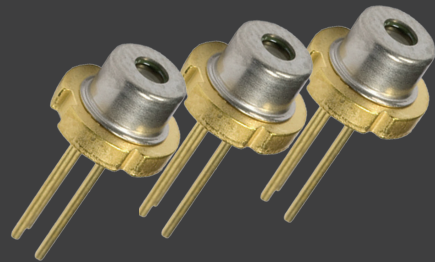

Available wavelengths:	455, 520, 638 nm
Typ. power multiline:	20 watts
Beam diameter:	~5 mm
Beam divergence (full angle):	<= 1,2 mrad
Diode type:	DIODE

Laserclass:	4
Optional safety feature:	scanfail, PASS, CDRH / EN60825 compliant
Optional gratings:	motorized burst, Lumia, Machida, 7-pos. Grating wheel
Optional internal controllers:	built-in FB-4
Scanning: (Cambridge)	L-SCAN 30 / Cambridge CT6215

Power input:	90 - 240 VAC, 50-60 Hz, max. 500 W
Optional input signal:	DMX, IDN (ILDA Digital Network), ILDA, Ethernet, MIDI
Modulation:	analog, up to 100 kHz
Storage temperature:	-20°C to +60°C
Operating temperature:	-10°C to +45°C
Cooling:	low noise air cooling with regulated fans
Housing:	dustproof IP54 black anodized aluminium
Mounting:	stable yoke for truss-mounting incl. safety
Total weight:	12 kg (20 kg incl. optional PELI-case)
Dimensions (L x W x H):	265 x 270 x 250mm

